










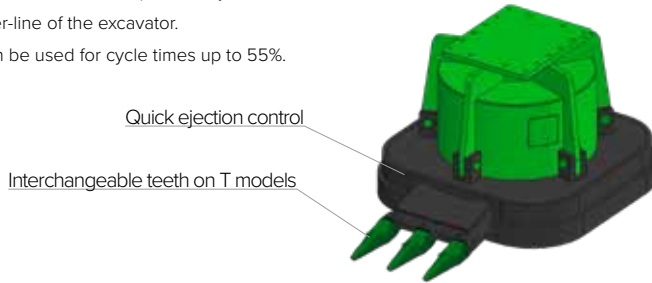




HMG/T SERIE Hydraulische magneten

The Hydraram HMG/T-SERIE are operated by the hydraulic hammer-line of the excavator.

The magnets can be used for cycle times up to 55%.



HYDRAULISCHE MAGNETEN		HMG-850	HMG-950	HMG-1100	HMG-1150	HMG-1300	HMG-1500
 Graafmachine klasse ¹ t		10 - 16	14 - 20	18 - 28	20 - 30	26 - 38	30 - 60
 Gewicht	kg	780	960	1100	1200	1880	2500
 Diameter	bar	180	180	180	180	180	180
 Werkdruk	l/min	38 - 200	50 - 200	70 - 200	80 - 200	100 - 200	100 - 200
 Oliedebiet	mm	850	950	1050	1130	1250	1500
 Vermogen	kW	3.5	4.5	5.5	6	7	12
 Energiespanning	volt.	230	230	230	230	230	230
 Los schroot	kg	500	700	900	1300	1800	3000
 Massieve plaat	kg	3500	3500	7000	11000	12000	20000

HYDRAULISCHE MAGNETEN - TAND		HMG-T850	HMG-T950	HMG-T1100	HMG-T1150	HMG-T1300	HMG-T1500
 Graafmachine klasse ¹ t		10 - 16	14 - 20	18 - 28	20 - 30	26 - 38	34 - 60
 Gewicht	kg	950	1130	1315	1400	2100	3000
 Diameter	bar	180	180	180	180	180	180
 Werkdruk	l/min	38 - 200	50 - 200	70 - 200	80 - 200	100 - 200	100 - 200
 Oliedebiet	mm	850	950	1050	1130	1250	1500
 Vermogen	kW	3.5	4.5	5.5	6	7	12
 Energiespanning	volt.	230	230	230	230	230	230
 Los schroot	kg	500	700	900	1300	1800	3000
 Massieve plaat	kg	3500	3500	7000	11000	12000	20000

¹ Aanbevolen combinatie graafmachine / aanbouwdeel
HMG-T Voorzien van verwisselbare tanden

